

# C Range pass through DISHWASHER

## C2035 WSHR



### Maidaid C2035 WSHR Features

- 2 year warranty
- **HEAT RECOVERY** offers up to 25% less power required to heat rinse water
- HR module supplied separately with simple bolt on instructions
- Reduces need for extraction hood and improves working environment
- Heat recovery, drain pump and improved internal continuous water softener design with increased range of water hardness settings as standard
- Four button bright LED display with soft touch controls, twin traffic lights giving instant status updates & operational self-diagnostics



**C2035 WSHR**  
(shown with tabling –  
not included)

- Increased usable height
- Alarms menu with hi-level information retrieval
- Improved wash action from quick release parallel wash & rinse arm design on both models
- Easy lift soft glide hood system
- Supplied with breaktank as standard
- Three standard cycle time options with further options available
- Cycle times can be tailored to site requirements
- Reduced water consumption
- Automatic self-cleaning at end of service
- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Patented dual flow wash pump– reducing power consumption whilst retaining wash efficiency
- Moulded wash tank for easy cleaning
- Surface scrap tray filters supplied as standard
- Accurate detergent & rinse aid peristaltic dosing pumps as standard

Supplied with one pegged (capable of holding 18 10" plates), one open rack (capable of holding 25 pint glasses) and cutlery insert.

Additional racks can be purchased at point of order:  
**Z972001 & Z972003**



# C Range pass through DISHWASHER

## C2035 WSHR



**C2035 WSHR**  
(shown with tabling –  
not included)

### Technical Data

Dimensions (W x D x H)	mm	640 x 745 x 2035 + Feet
Feet height	mm	165-225
Rack size	mm	500 x 500
Maximum useable height	mm	435
Door opening	mm	460
Theoretical productivity	Racks/h	51
Effective productivity	Racks/h	36*

\*Allowing 30 seconds for reloading  
Cycle times may vary depending on local conditions/services

Wash tank element	kW	2.1
Boiler element	kW	6.0
Wash pump	kW	0.47
Tank capacity	L	15
Noise emission	dB	≤ 65

### Packaging Specs


#### C2035 WSHR:

Gross weight	Kg	100
Cubic volume	m <sup>3</sup>	0.98
Dim. (W x D x H)	mm	840 x 760 x 1520

#### Heat Recovery module (supplied separately):

Gross weight	Kg	26
Cubic volume	m <sup>3</sup>	0.18
Dim. (W x D x H)	mm	720 x 760 x 310

### Installation Diagram – All services must be within 1 meter

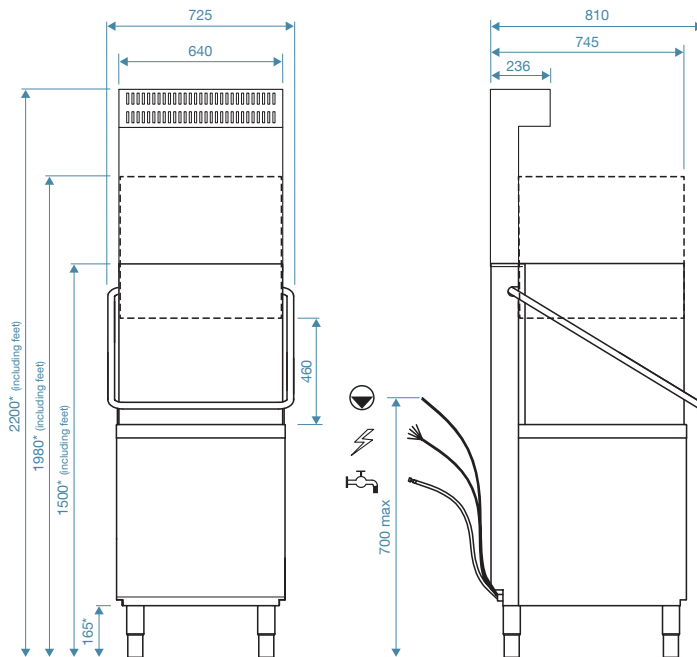

\*Height-adjustable feet + 60mm

- Pumped waste into upstand, maximum height 700mm**
- Power**
- Water supply 2 – 4 bar**

### Power Supply

Installed power	AMP	kW
230V – 50Hz – 1N	20	4.5
	30*	6.5
Optional 3 Phase config	Total load 6.5kW	
Fused	16 amp	

\*Standard configuration

### Water Connection

Inlet water pressure	Bar	2 to 4
Flow rate L/Min	L/Min	6
Water inlet temp	°C	10 to 50
Water connection	BSP	¾"
Waste connection	Ø	Int 29/ext 34

### Cycle Information

Number of standard cycles		3
Standard cycles times	Sec	70/90/120
Special cycle		Eco, Glass, Long
Self-cleaning cycle		Full self clean
Water consumption per cycle	L	2
Wash temperature	°C	60 – adjustable
Rinse temperature	°C	82 – adjustable